


Products	ASC4806-4K-PL, ASC3204-4K-PL, ASC1602-4K, SMX12x4, NXT1604-4K, NXT0802-4K, V701 Non-4K and Non-PL units are also supported
Date	February 22, 2016
Version	2.00.34

The version (s) indicated here above has (have) been tested and validated by the Technical Support Department.

Technical Notes:

Version 2.00.34

Evolutions

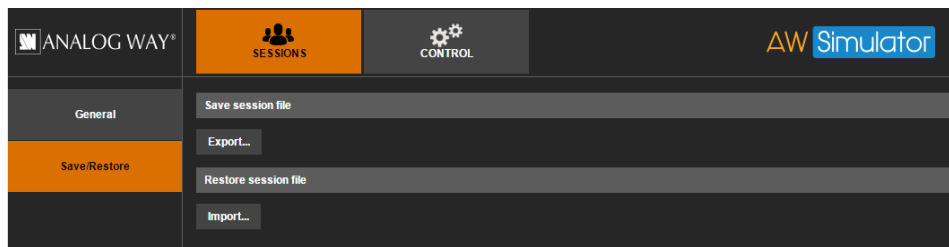

- This version allows to prepare your configuration offline and import it straight into your device. You can also import a configuration from a real processor and edit it offline

Important: This feature requires LiveCore™ firmware v4.02.21 or higher and VIO 4K firmware v1.20.19 or higher

- This version now supports all the LiveCore™ series switchers as well as some hardware options such as 4K, PL or LINK. For the VIO 4K you can now also choose and configure expansion cards
- In case of issues, you can now also export the Log File (CONTROL > Log) and send it to Analog Way's technical support for investigation
- New Flat Design user interface

PREVIOUS VERSIONS

Version 1.10.04Improvements

- Better support for VirtualBox 5.1

Version 1.10.03Bug fixes

- LiveCore series:
 - Fixed an issue with some TPP commands.
 - Fixed issues with confidence presets

Version 1.10.02New features

- Support of Custom Formats for LiveCore series.
- Improvement of the interface of the AW Simulator website.
- New label of the simulation state in the AW Simulator website.

Bug fixes

- Depending on the configuration of the PC running the simulator, it is impossible to connect to the simulated device.
- Impossible to connect to a LiveCore unit with Windows 10.
- LiveCore series:
 - The Cut&Fill feature should not be possible for 4K/DL layers.
 - It should not be possible to select a custom format apart the 10 available ones.
 - Improvement of the output formats availability depending on the selected rate.
 - Improvement of library management.
 - Improvement of tally management.
 - Better support of the TPP commands.
 - Fix the disconnection problem when setting the soft-edge blending.
- VIO4K (ref. V701) multi-format converter:
 - Improve format CEA-861 management.
 - Improve Custom Format status.
 - Quick Frame problem fixed.

Limitations:

- Configuration cannot be Imported/exported from/to a 'real' device (feature planned for a later release).

Known issues:

- On VIO 4K, importing images whose file size is greater than 5MBytes may cause connection problems.

Version 1.00.00

Initial release:

- Simulate Analog Way VIO 4K and LiveCore™ devices.
- Integrated WebRCS for self-training or for preparing a configuration (offline mode).
- Save your work at the end of simulation session and seamlessly resume it the next time.
- Available for Windows and Mac OS X.

Limitations:

- Configuration can't be Imported/exported from/to a 'real' device (feature planned for a later release).

Known issues:

- Users might experience some WebRCS disconnection issues while long pressing Up/Down buttons for more than 4 sec (on the Soft-Edge blending overlap settings page only).