

Remote Control Keypad designed to control Analog Way's Seamless Switchers



RK-300 at a glance

- > Very User-friendly Remote Control Keypad
- > Controls different Switchers
- > Mini Joystick for easy element control
- > Ethernet LAN RJ45 connector for easy connection
- > Large VFD display offering high contrast menu


To control the following Seamless Switchers:

- > EKS500: Eikos
- > EKS400: Eikos LE
- > OPS300: OPS300
- > OPS200: OPS200
- > PLS300: Pulse
- > PLS200: Pulse LE
- > SMX200: Smart Matrix
- > SMX100: Smart Matrix LE
- > SVU300: SmartVu
- > SVU200: SmartVu LE
- > SQD200: Smart Quad
- > STE200: Smart Edge FX
- > STE100: Smart Edge

Reference

- > RK-300: Remote Keypad RK-300

Diagram

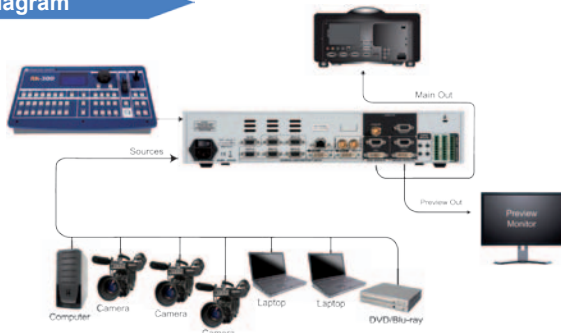

ANALOG WAY
Pioneer in Analog, Leader in Digital

Key Features

User Controls

- Graphic Fluorescent display with high contrast
- Displays controlled Device Status
- Full control menu and settings of several switchers
- Direct PIPs, Logos, Frames and Sources selection
- User defined layers properties memories
- Illuminated 3 color buttons
- Mini T-Bar to control effect level
- Easy adjustments by Mini-Joystick
- Stand By mode

Input/Output Connectors

- RJ45 for TCP/IP Ethernet connection
- RS232 Com Port
- Power Jack Coax

Power Supply

- External, universal, 100-240 VAC; 47-63 Hz 400mA, output: 9VDC 1.5A

Supplied with

- 1 x Desktop Power Supply
- 1 x Quick Start Guide*
- 1 x DB9 (M/F) cable
- 1 x Carrying case

Dimensions

Front Panel

- D 7.28" x W 12.59" x H 1.58"
- D 185 mm x W 320 mm x H 45 mm

Box

- D 6.49" x W 11.81" x H 1.57"
- D 165 mm x W 300 mm x H 40 mm

Weight

- 1.5 kg (3.3 lbs)

Warranty

3-year warranty on parts and labor back to factory

Specifications subject to change without prior notice



* All RCS, User Manuals and Quick Start Guides are also available on www.analogway.com